

FIG. 3 is a perspective view of a first embodiment of the present invention. The device 40 includes a base 45 and a plurality of protrusions 50. The protrusions 50 are arranged in a row along the top edge of the base 45. Each protrusion 50 has a rectangular top surface and a tapered side surface. The base 45 is a rectangular plate with a slightly raised edge on the right side.

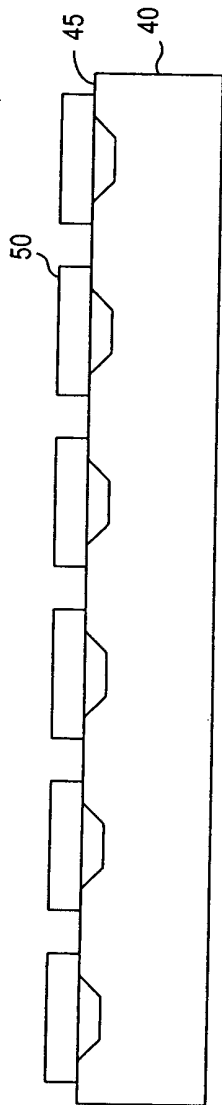


FIG. 3

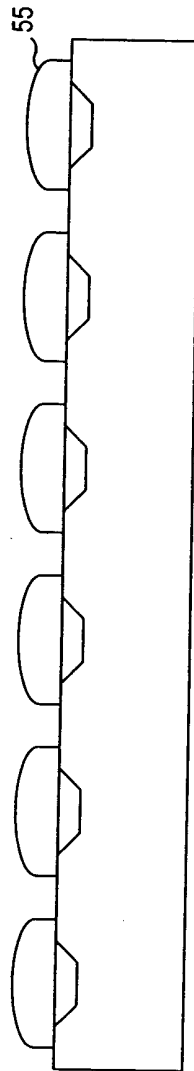


FIG. 4

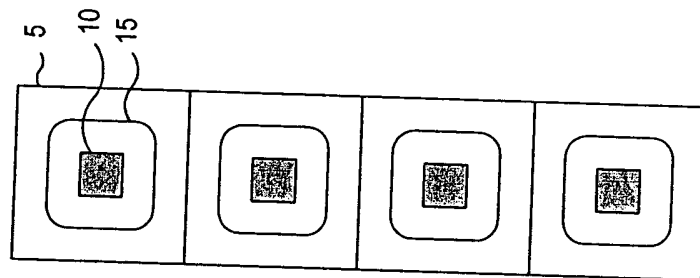


FIG. 1

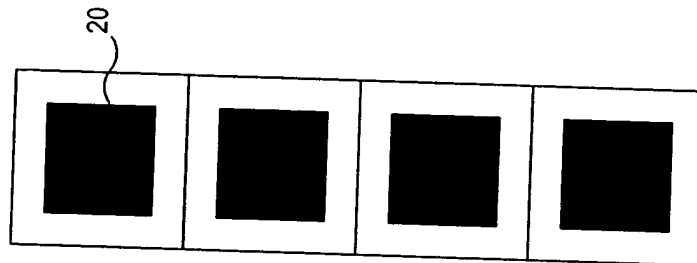


FIG. 2

+

+